




LSACP-E V2L Discharger Optimize Charging With Schedule Sessions For Electric Vehicles

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: LS
- Certification: CE, CQC, UL
- Model Number: LSACP-E
- Minimum Order Quantity: 50 units
- Price: consult prices online
- Packaging Details: consult online
- Payment Terms: T/T

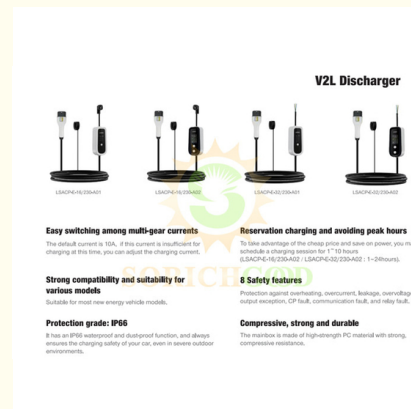

Product Specification

- Output Power: 3.5kW / 7kW
- Rated Output Voltage: 230VAC
- Rated Output Current: 13A / 32A
- Protection Grade: IP66
- Operation Temperature: -20°C To +50°C
- Cable Length: 5m (customizable)
- Highlight: 7kW electric vehicle charger,
3.5kW electric vehicle charger,
13A electric car charger

Product Description

LSACP-E V2L Discharger Optimize Charging with Schedule Sessions for Electric Vehicles

Product Description:

The LSACP-E series V2L Discharger is designed for efficient and high-performance electric vehicle charging, supporting both 3.5kW and 7kW output power options. Equipped with adjustable multi-gear current settings, it provides flexibility for different charging needs. The discharger is highly compatible with most new energy vehicle models and offers IP66 waterproof and dust-proof protection, ensuring safety in various environmental conditions. With strong and durable high-strength PC material construction, this discharger is suitable for use in both indoor and outdoor environments.

Easy switching among multi-gear currents

The default current is 10A, if this current is insufficient for charging at this time, you can adjust the charging current.

Reservation charging and avoiding peak hours

To take advantage of the cheap price and save on power, you may schedule a charging session for 1~10 hours (LSACP-E-16/230-A02 / LSACP-E-32/230-A02 : 1~24hours).

Strong compatibility and suitability for various models

Suitable for most new energy vehicle models.

8 Safety features

Protection against overheating, overcurrent, leakage, overvoltage, output exception, CP fault, communication fault, and relay fault.

Protection grade: IP66

It has an IP66 waterproof and dust-proof function, and always ensures the charging safety of your car, even in severe outdoor environments.

Compressive, strong and durable

The mainbox is made of high-strength PC material with strong, compressive resistance.

Technical parameter	
Types	LSACP-E-16/230-A01 LSACP-E-16/230-A02 LSACP-E-32/230-A01 LSACP-E-32/230-A02
Output Power	3.5kW 7kW
Rated Output Voltage	230VAC
Rated Output Current	13A 32A
Display Mode	LED light 2.4 'color TFT screen LED light 2.4 'color TFT screen
Use Method	Plug and charge
Rated Output Frequency	50Hz
Insulation Resistance	>10MQ
Operation Temperature	-20°C~+50°C
Cable Length	5m (customizable)
Dimension	Control mainbox:200(L)*90 (M)*55mm(H)
Fame Retardant Rating	UL94-V0
Optional Plug type	European Standard,US Standard,National Standard three-pronged plug,etc

Application:

The LSACP-E series V2L Discharger is ideal for residential, public, and commercial charging applications. It provides effective and safe charging solutions for electric vehicles at home, public parking lots, shopping malls, and highways. The device's capability to schedule charging sessions helps users optimize charging during off-peak hours, enhancing energy efficiency and cost savings.

Shipping Methods

Supports global air and sea shipping.



RICHGOOD ENERGY CO.,LTD



willia@fuhaosolar.com



fuhaosolar.com

Rm3810 Baoli E Building Pa Zhou Haizhu district Guangzhou